

4

3

2


1

D

C

B

A

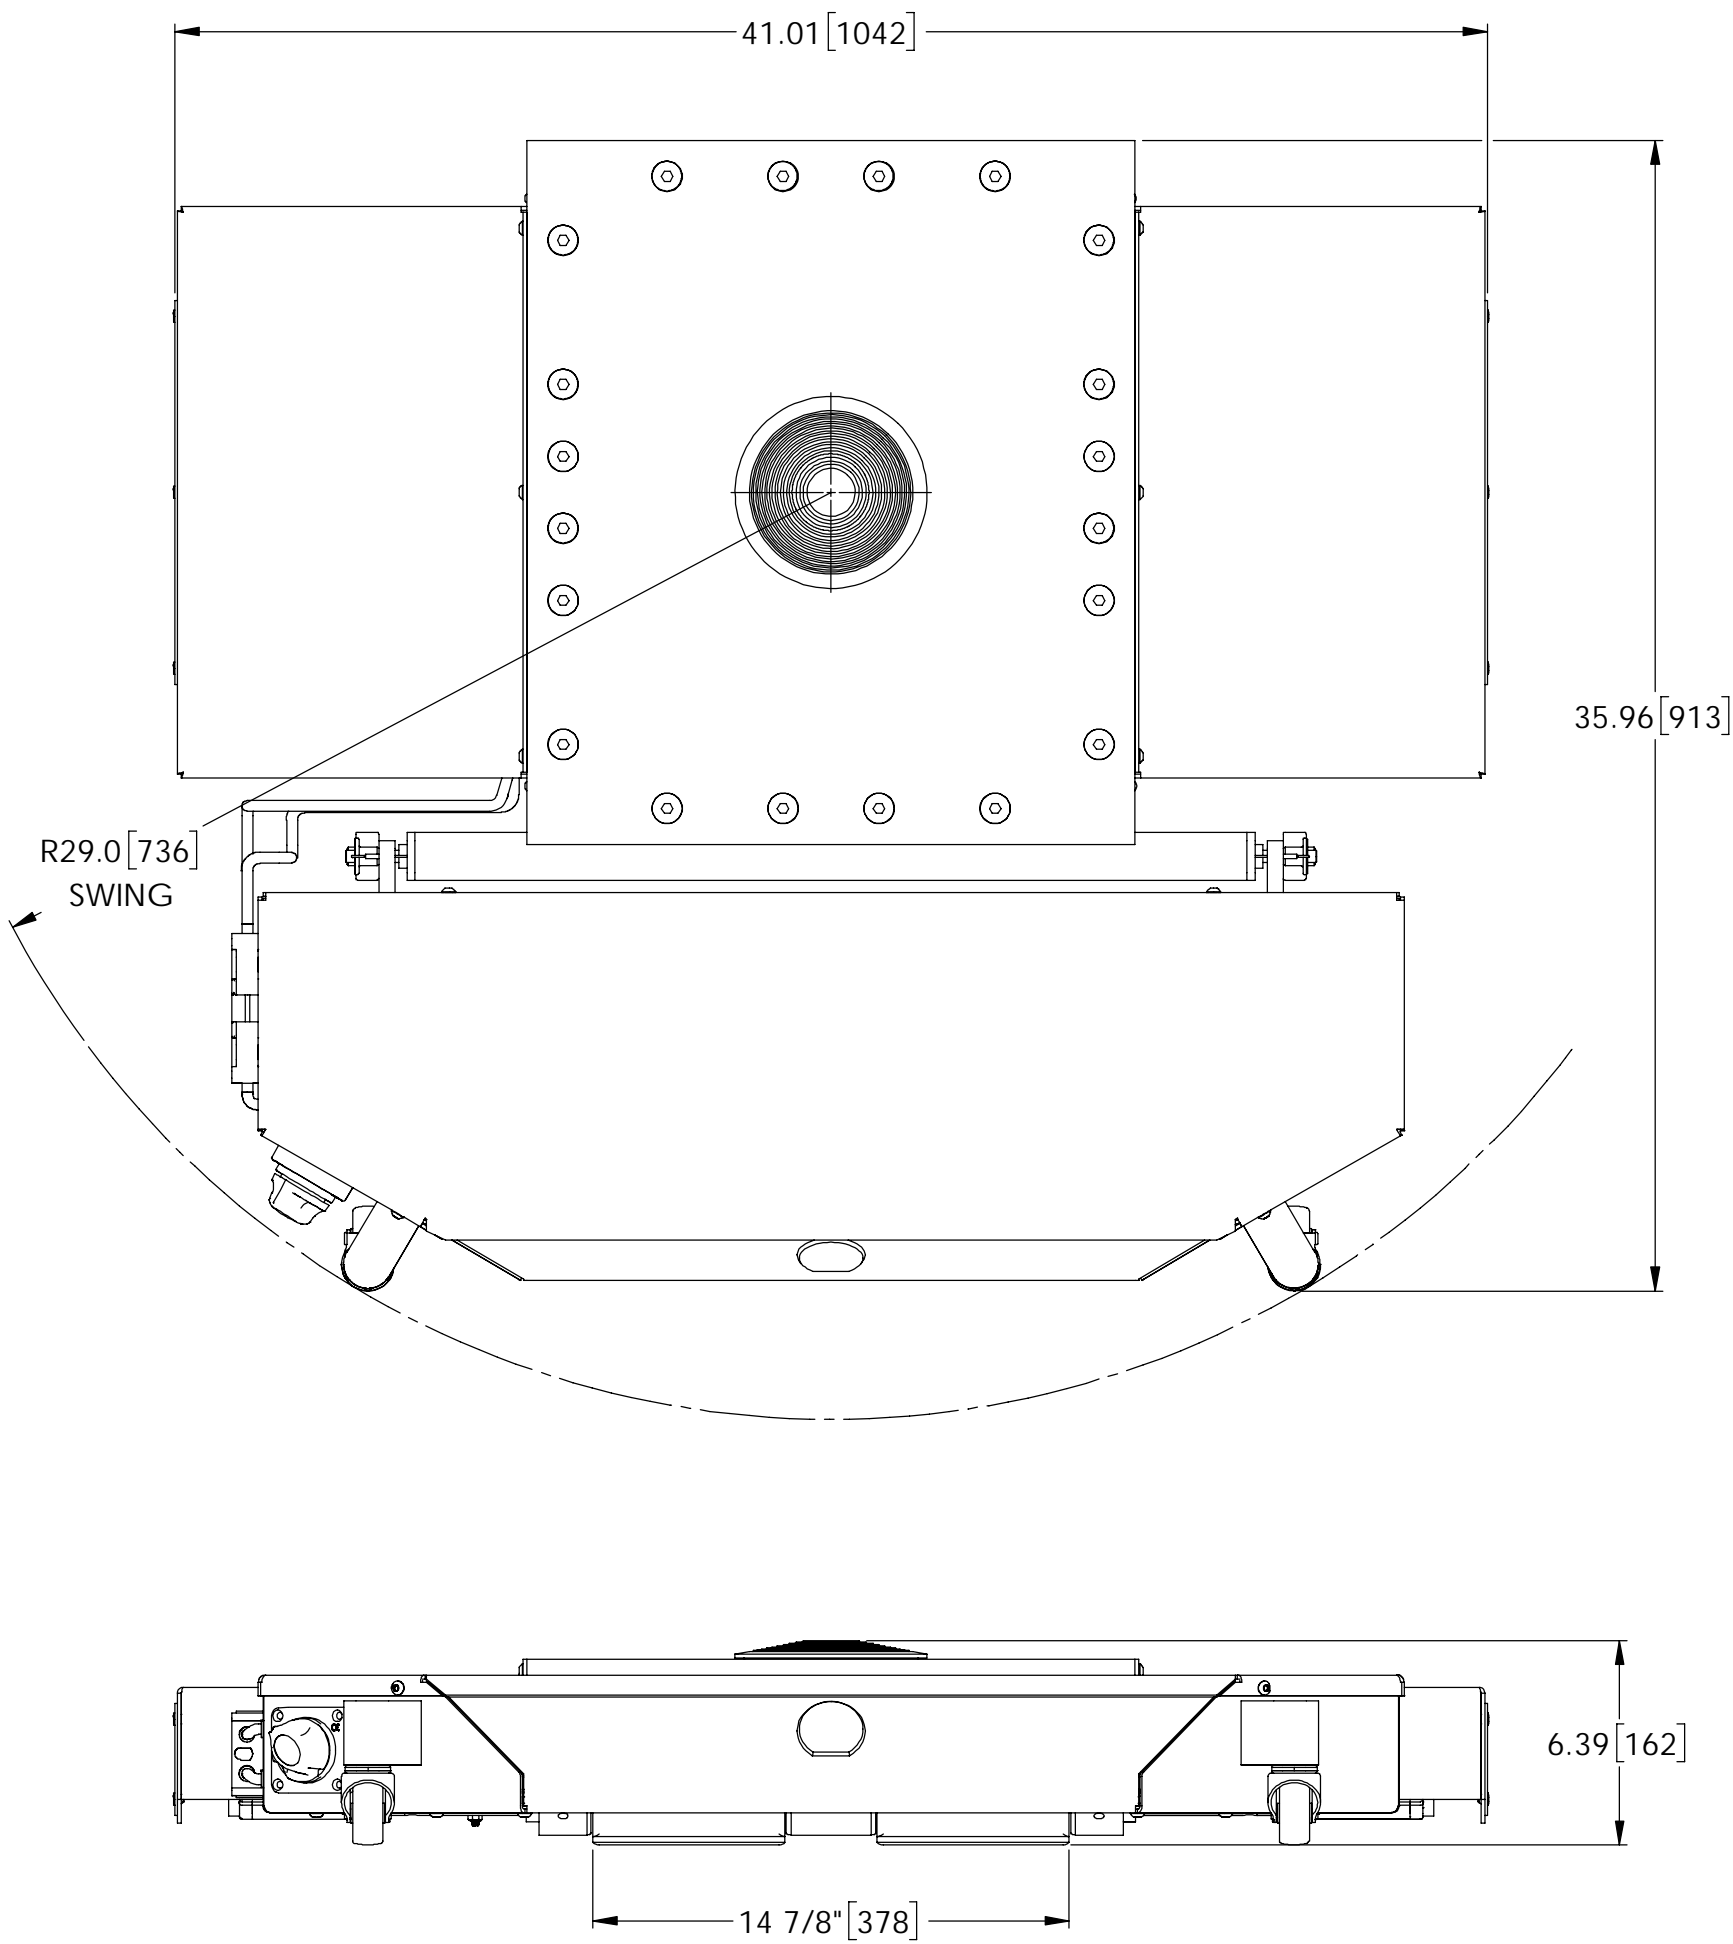

- NOTE:
1. DIMENSIONS ARE IN INCHES [MILLIMETERS]
 2. ALL DIMENSIONS ARE FOR REFERENCE ONLY
 3. ACTUAL TRANSMITTER APPEARANCE MAY VARY
 4. CAPACITIES:
 - DIRECT CRAWLER LOAD: 20 SHORT TON (40,000 lb)
 - ADDITIONAL TOWING LOAD: 20 SHORT TON (40,000 lb)
 - TOTAL MOVING CAPACITY: 40 SHORT TON (80,000 lb)
 - CAPACITY IS BASED ON A FLAT LEVEL RIDING SURFACE WITH HILMAN REAR DOLLIES
 5. BATTERY:
 - 48VDC / 50AH W/ DISCONNECT SWITCH
 - STATE OF CHARGE (SOC) DISPLAY ON FRONT
 - BATTERY CAN BE SWAPPED WITH CRAWLER LOADED
 - RECHARGE TIME UNDER 3 HOURS
 - ONLY USE HILMAN SUPPLIED CHARGERS TO AVOID DAMAGE
 6. CRAWLER IS OF THE SKID STEER TYPE WITH NEAR ZERO TURN RADIUS
 7. THE SWING RADIUS DEFINES THE CLEARANCE REQUIRED TO FULLY ROTATE THE CRAWLER UNDERNEATH A LOAD
 8. CRAWLER IS INTENDED TO BE USED WITH COMPRESSION PAD ATOP TURNABLE (NOT SHOWN)
 9. TURNABLE IS REMOVABLE TO EXPOSE TAPPED HOLE FOR LIFTING EYE
 10. DO NOT LIFT CRAWLER WITHOUT REMOVING BATTERY OR DAMAGE MAY OCCUR
 11. DO NOT SCOOP CRAWLER WITH FORKS OR STRAPS OR DAMAGE MAY OCCUR

4

3

2


1



D

C

B

A

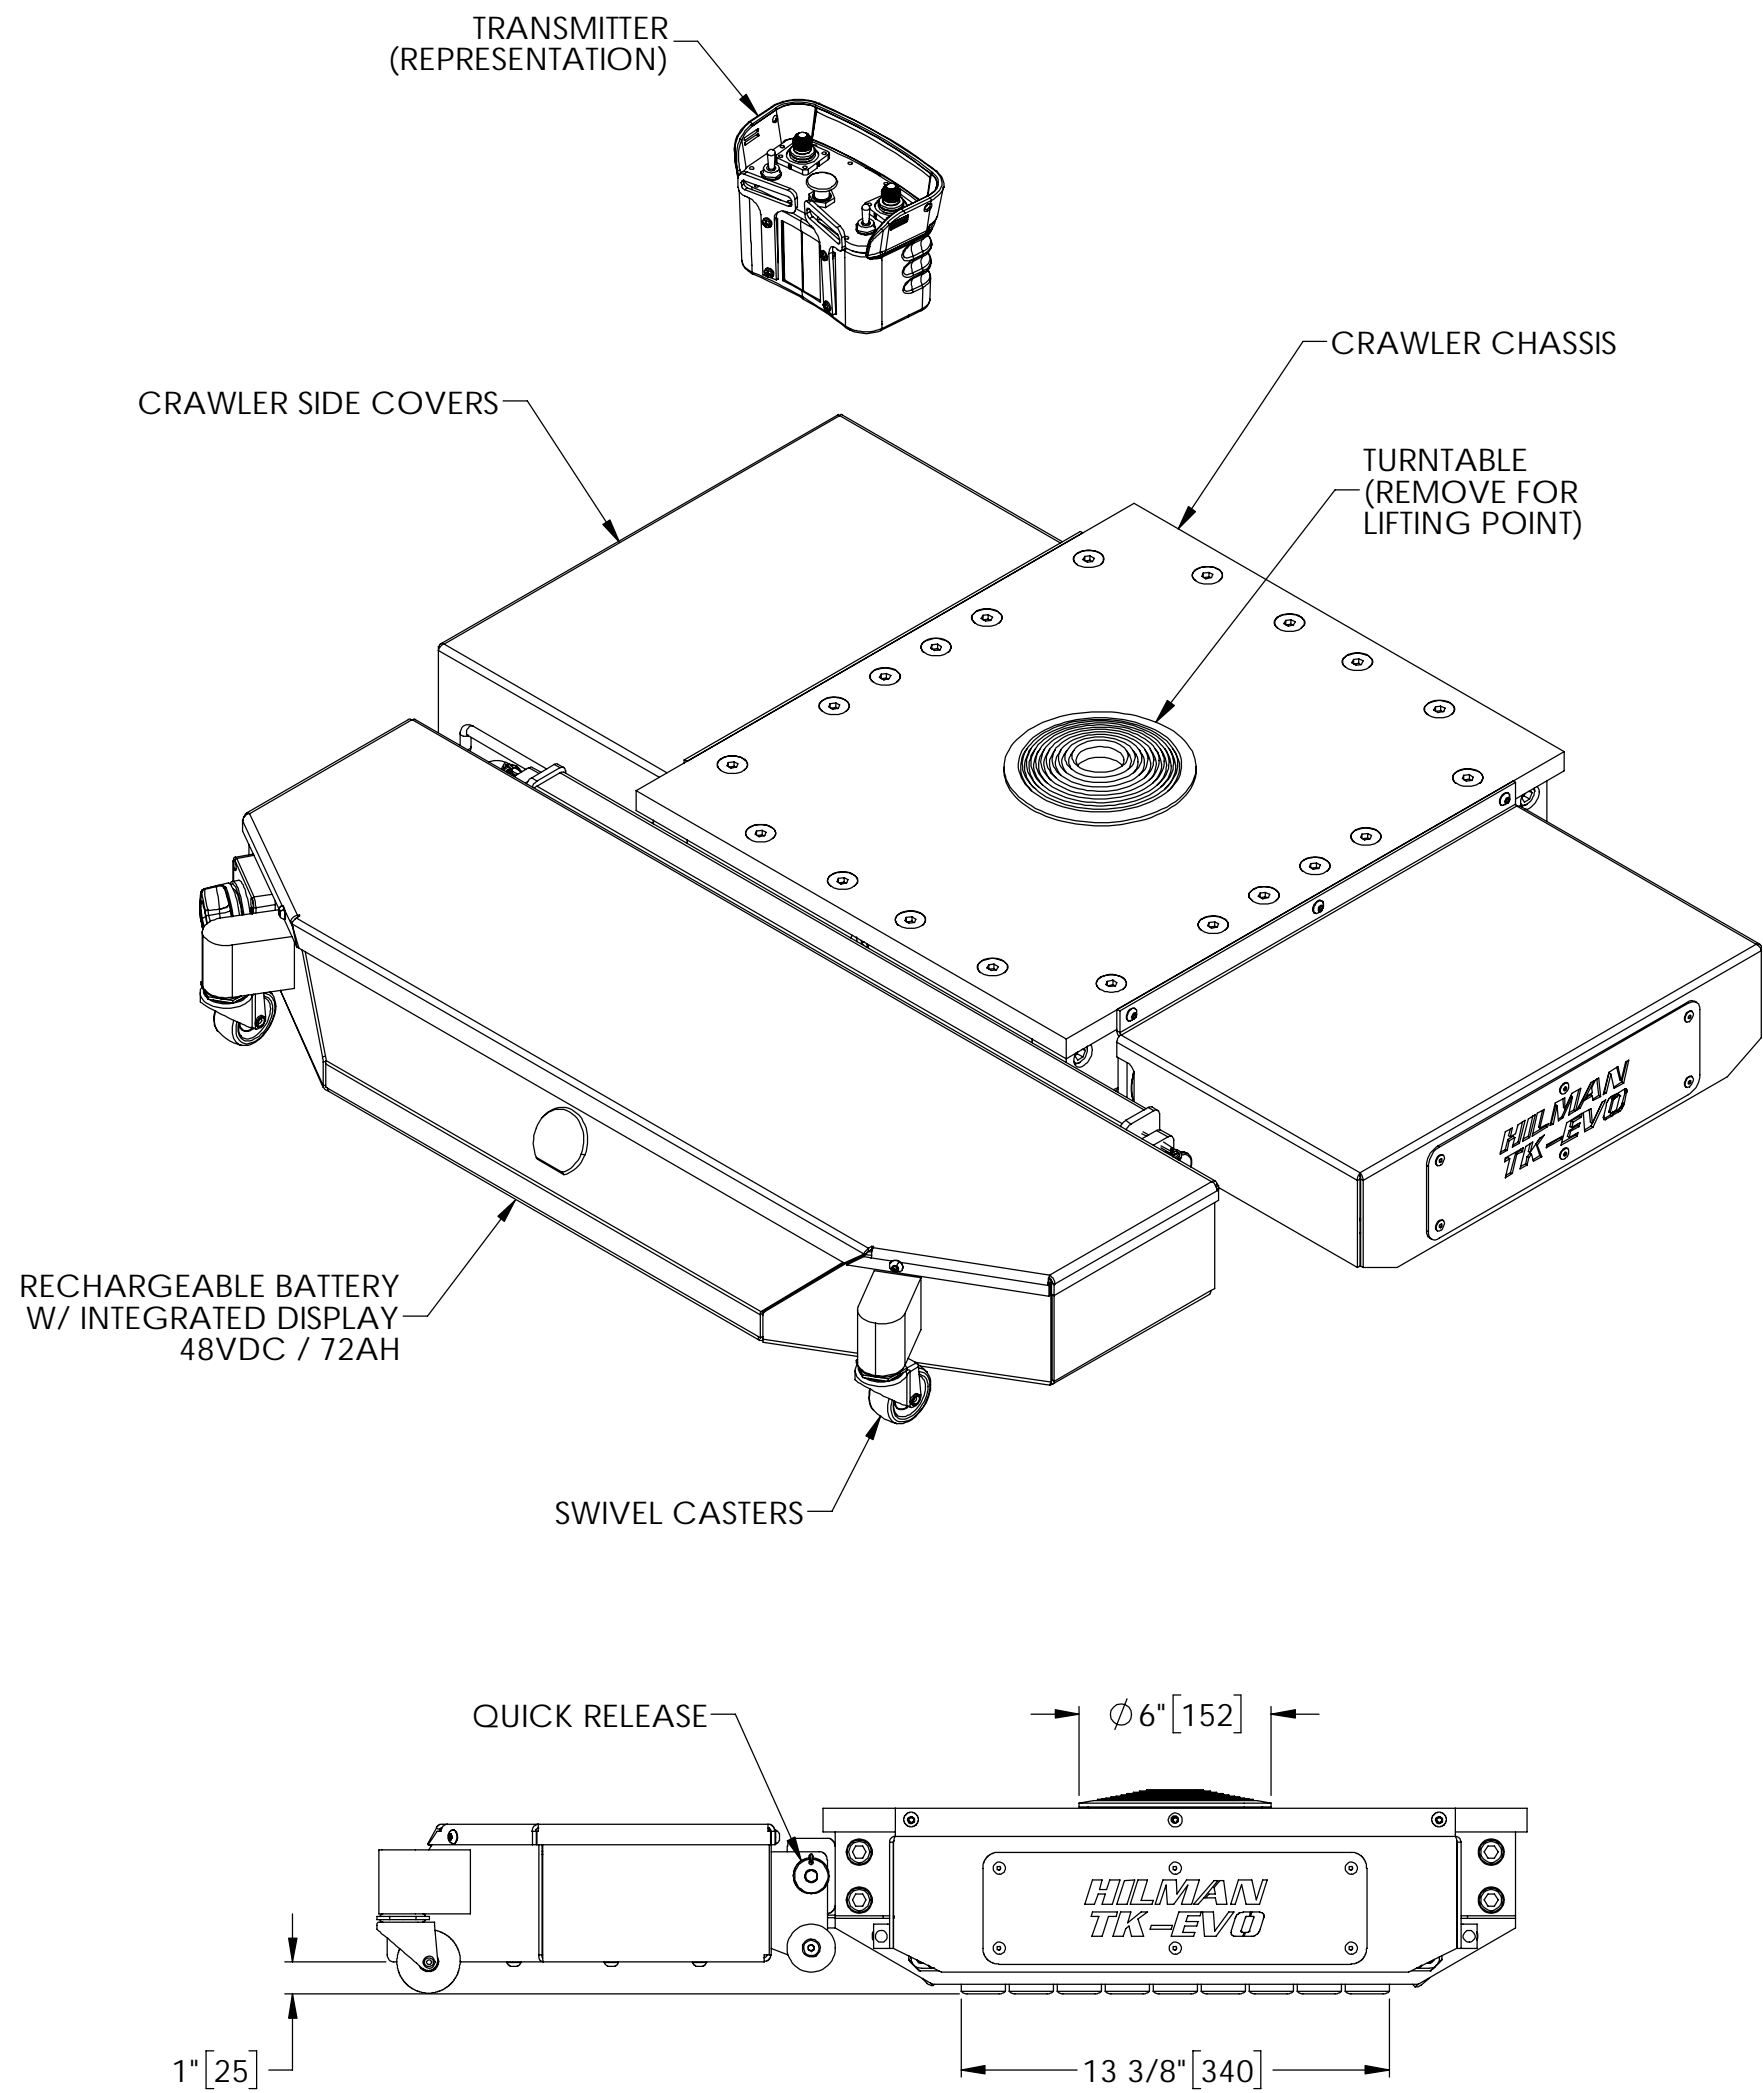

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		 12 TIMBER LANE, MARLBORO, NJ 07746 USA		NAME	DATE
				DRAWN	DF 07/06/2017
				CHECKED	-
				ENG APPR.	-
		TITLE		WEIGHT: 580 lb	
		TRAKSPORTER EVOLUTION (TK-EVO)		REV	
SCALE: 1:6		SIZE	DWG NO	TK-EVO	
C					
CONFIDENTIALITY RULES APPLY				SHEET: 1 OF 1	