

TK-EVO





TK-EVO

Move heavy loads without cords and hazardous exhaust fumes! It is great for use on special flooring including clean rooms, healthcare facilities, microchip and manufacturing plants and more!



POWERED 3-POINT MOVING


The TK-EVO can be used in a 3 point configuration with a pair of rear dollies for easy and safe moving. The TK-EVO can also be used in combination with our other products such as omni-skates which allow for 360 degree rotation.

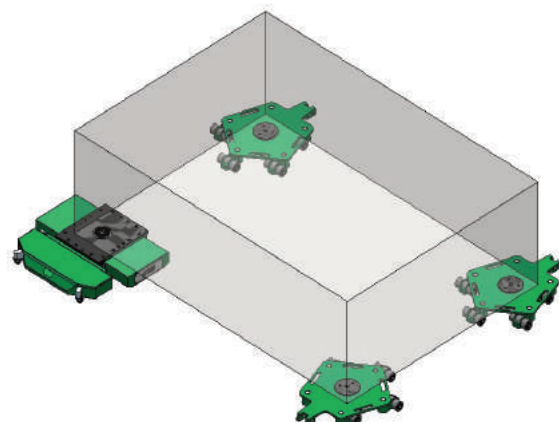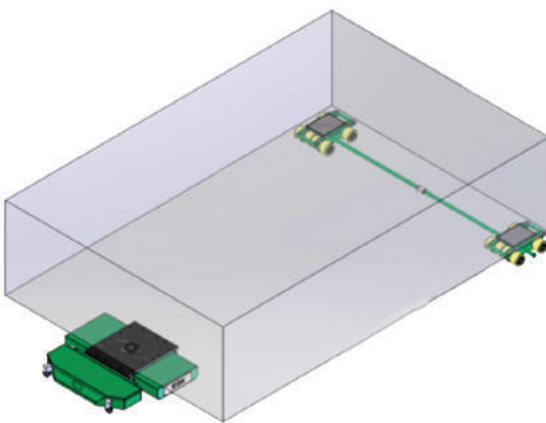

*Images are for representation purposes only. Actual product configuration and support points will differ based on the load.

FEATURES

Typical battery life under working conditions is up to 3-4 hours. Charge time per battery is up to 1 hour with standard 110V single phase outlet.

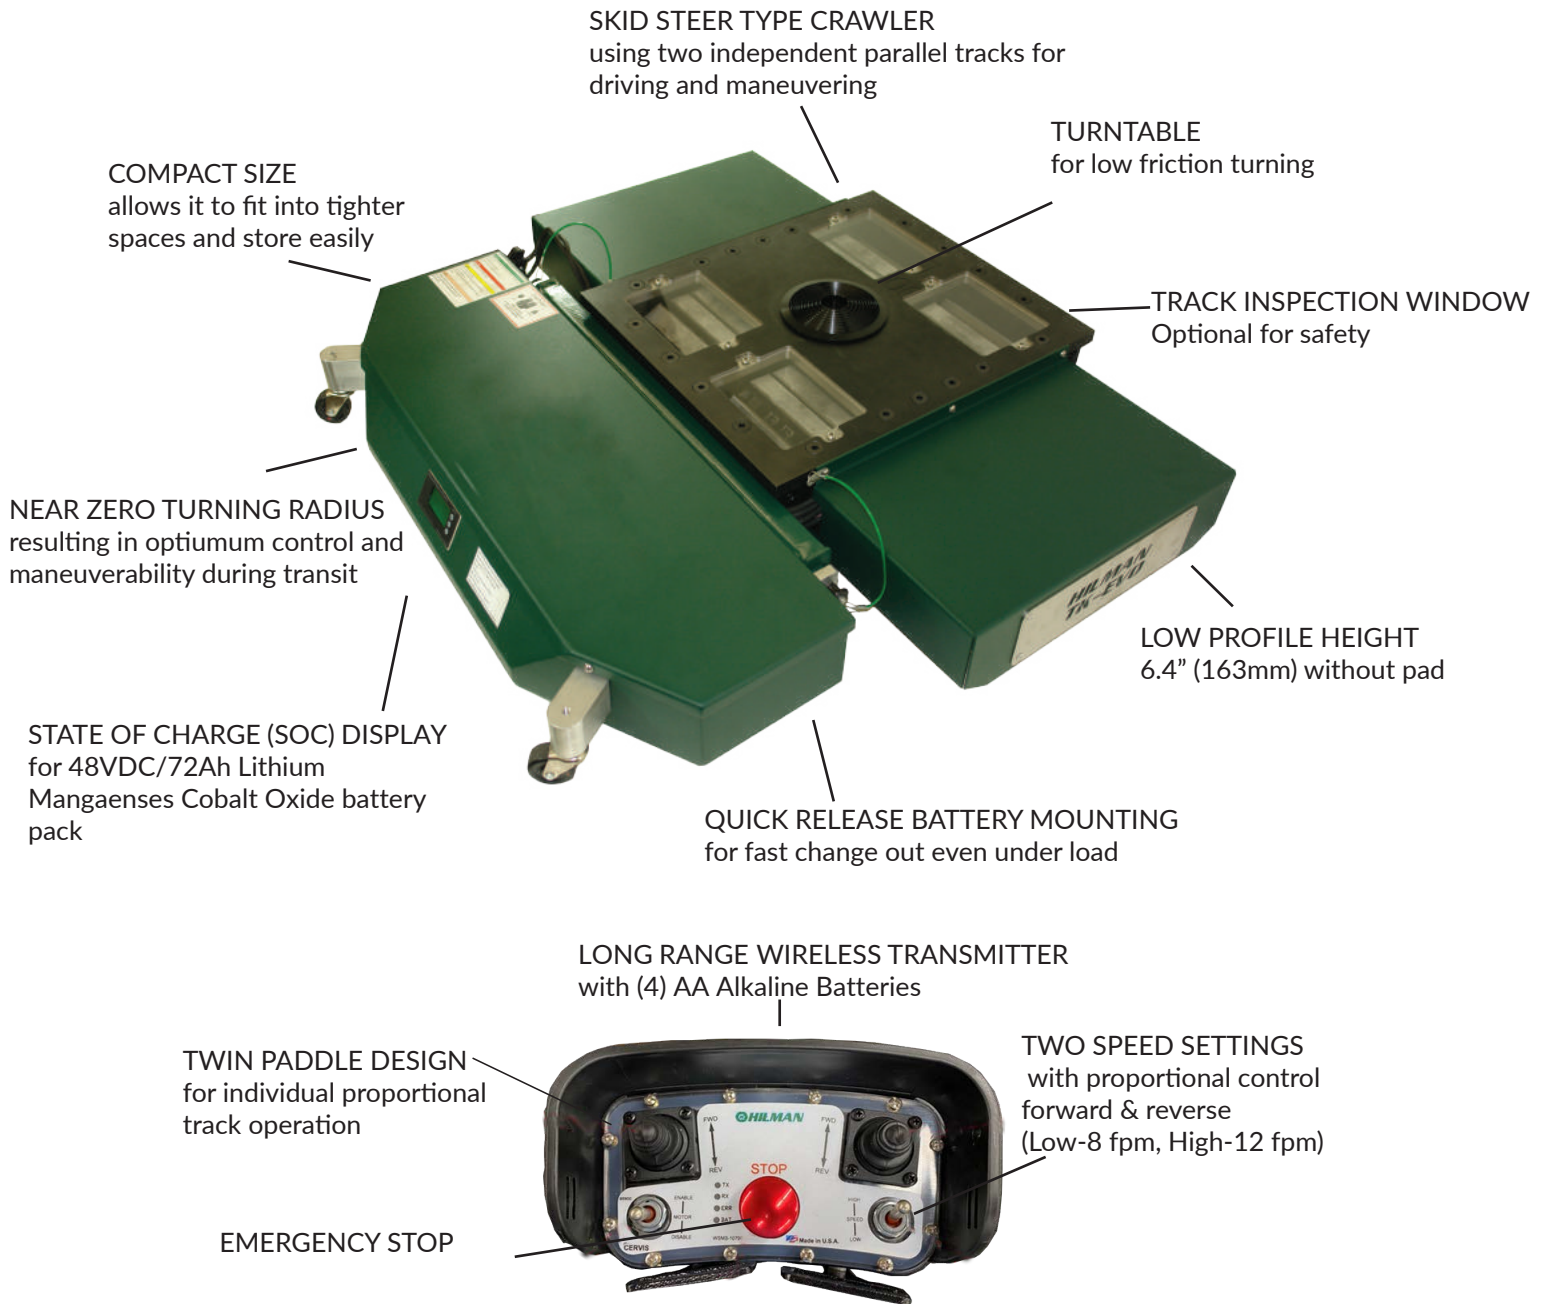

Dimensions	
Width	41" (1041mm)
Length	36" (914mm)
Height	6.4" (163mm) without pad
Capacity*	
Crawler Only	20 ton (40,000 lb)
Trailer Only	20 ton (40,000 lb)
Combined Load	40 ton (80,000 lb)

*Based on flat level riding surface

BENEFITS



NO CORDS. NO EMISSIONS

- No cords eliminate tripping hazards for crew members
- No hazardous exhaust fumes from a IC engine to limit areas for operation
- Quiet operation eliminates the need for ear protection while improving crew communication

PERFORMANCE

- 2 Speed settings with proportional control forward and reverse
 - o High Speed: 12 fpm
 - o Low Speed 8 fpm
- Near zero crawler turning radius
- 48VDC/60Ah with State of Charge (SOC) display
 - o Expected Run Time: 3 - 4 hours
 - o Recharge Time: 1 hour with standard 110V single phase outlet




CUSTOM SOLUTION

The TK-EVO can be customized to meet the needs of a specific project. Inspection windows can be added for safety. It can also be combined with other product to make a complete custom moving solution.

PACKAGES

The TK-EVO is offered in a basic package that includes (1) TK-40E with battery and charger and more!

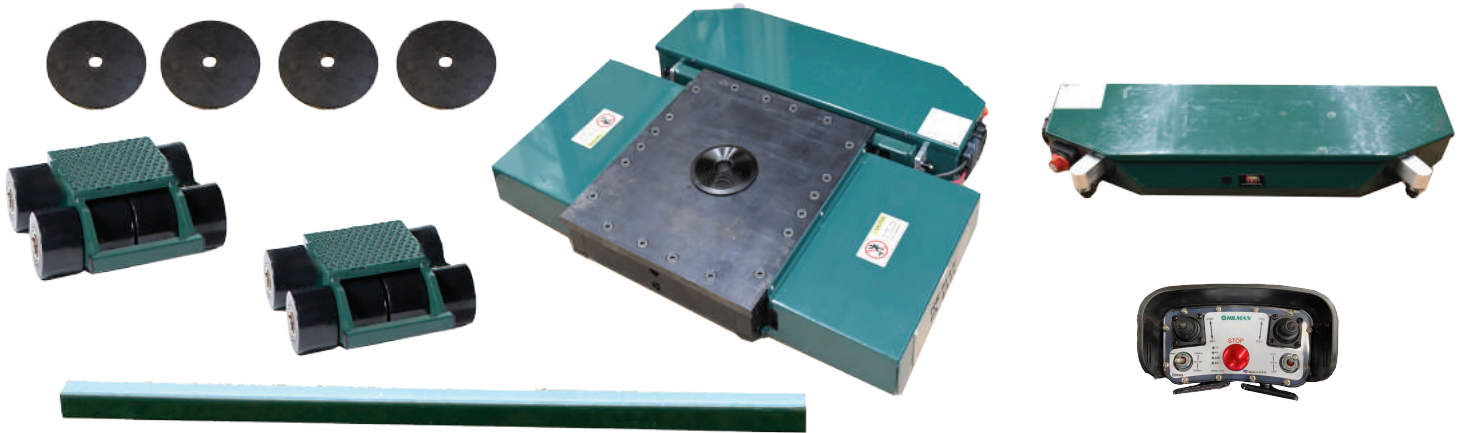

BASIC PACKAGE


Includes:

- (1) TK-EVO Crawler with Battery
- (1) Remote Control
- (1) Spare 48VDC/60Ah Battery
- (1) Battery Charger
- (2) 10 Ton Capacity Dollies
- (1) 8 ft Alignment Bar
- (4) Preload Pads

Training is also included with this package (8 hours max and includes no more than 4 groups-max 8 people per group). For more information please contact us.

CUSTOM OPTIONS

Custom options are available for your specific application including track inspection windows, attachments, turtlebacks and turntables, and rear dolly modifications.

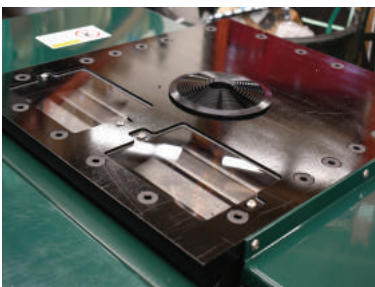



HILMAN INC.
12 Timber Lane
Marlboro, New Jersey 07746
USA
Phone: +1-732-462-6277
E-mail: sales@hilmanrollers.com
Website: www.hilmanrollers.com

ISO 9001